




Refrigerants by The Chemours Company

Pressure-Temperature Guide for A/C

Key: **Green** (in of Hg) = Vacuum
Black (psig) = Saturated Vapor (calculate superheat)
Bold (psig) = Saturated Liquid (calculate subcooling)

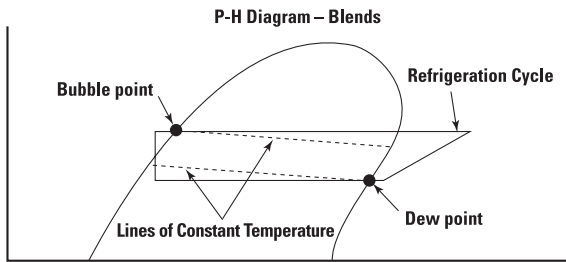

To determine superheat, use **dew point** values.
 To determine subcooling, use **bubble point** values.

DO NOT MIX REFRIGERANTS

No A2L refrigerant is to be used as a retrofit refrigerant
A2L refrigerants can only be used in new equipment
Always remove refrigerant blends from the cylinder as liquid

For refrigerant related support, contact our Tech2Tech Support Team:

tech2tech@chemours.com 866-433-TECH
 (8324)



To add our Tech2Tech Support as a contact in your mobile device, use the QR Code above.

For more information about Opteon™ refrigerants, visit opteon.com



© 2024 The Chemours Company FC, LLC. Freon™, Opteon™, and any associated logos are trademarks or copyrights of The Chemours Company FC, LLC. Chemours™ and the Chemours Logo are trademarks of The Chemours Company.

OPTXLPTAC-2 01/24


SAFETY GROUP	Freon™ 410A (R-410A)	Opteon™ XL41 (R-454B)	Freon™ 407C (R-407C)	Freon™ NU-22B™ (R-422B)	Freon™ MO99™ (R-438A)	Freon™ 22 (R-22)	R-32
	A1	A2L	A1	A1	A1	A1	A2L
°F	psig	psig	psig	psig	psig	psig	psig
-50	4.9	3.1	11.0	11.6	11.4	6.1	5.2
-45	7.6	5.6	8.0	8.7	8.5	2.7	8.0
-40	10.7	8.4	4.6	5.5	5.2	0.6	11.0
-35	14.0	11.4	0.9	1.9	1.5	2.6	14.4
-30	17.7	14.8	1.6	1.1	1.2	4.9	18.2
-25	21.8	18.5	3.9	3.2	3.5	7.4	22.3
-20	26.2	22.6	6.5	5.7	5.9	10.2	26.8
-18	28.1	24.3	7.6	6.7	7.0	11.4	28.7
-16	30.0	26.1	8.7	7.8	8.1	12.6	30.7
-14	32.0	27.9	9.9	8.9	9.2	13.9	32.8
-12	34.1	29.8	11.1	10.1	10.4	15.2	34.9
-10	36.3	31.8	12.3	11.3	11.6	16.5	37.1
-8	38.5	33.8	13.7	12.5	12.9	17.9	39.4
-6	40.8	35.9	15.0	13.8	14.2	19.4	41.7
-4	43.2	38.1	16.4	15.2	15.6	20.9	44.2
-2	45.7	40.4	17.9	16.6	17.0	22.4	46.7
0	48.2	42.7	19.4	18.0	18.5	24.0	49.3
2	50.8	45.1	21.0	19.5	20.0	25.7	51.9
4	53.5	47.6	22.6	21.1	21.6	27.4	54.7
6	56.3	50.1	24.3	22.7	23.2	29.2	57.5
8	59.2	52.7	26.1	24.4	24.9	31.0	60.5
10	62.2	55.4	27.9	26.1	26.6	32.8	63.5
12	65.2	58.2	29.8	27.8	28.4	34.8	66.6
14	68.4	61.1	31.7	29.7	30.3	36.8	69.8
16	71.6	64.1	33.7	31.6	32.2	38.8	73.1
18	74.9	67.1	35.7	33.5	34.2	40.9	76.5
20	78.4	70.3	37.9	35.5	36.2	43.1	80.0
22	81.9	73.5	40.1	37.6	38.3	45.3	83.6
24	85.5	76.8	42.3	39.7	40.5	47.6	87.3
26	89.2	80.3	44.7	41.9	42.8	50.0	91.1
28	93.1	83.8	47.1	44.2	45.1	52.4	95.1
30	97.0	87.4	49.6	46.6	47.5	55.0	99.1
32	101.1	91.1	52.1	49.0	49.9	57.5	103.2
34	105.2	94.9	54.8	51.5	52.5	60.2	107.5
36	109.5	98.8	57.5	54.0	55.1	62.9	111.9
38	113.9	102.9	60.3	56.6	57.7	65.7	116.3
40	118.4	107.0	63.2	59.4	60.5	68.6	121.0
42	123.0	111.2	66.1	62.1	63.3	71.5	125.7
44	127.7	115.6	69.2	65.0	66.3	74.5	130.5
46	132.6	120.0	72.3	67.9	69.3	77.6	135.5
48	137.5	124.6	75.5	71.0	72.3	80.8	140.6
50	142.6	129.3	78.8	74.1	75.5	84.1	145.8
52	148.4	140.0	101.7	88.6	94.6	87.4	151.2
54	153.8	145.1	105.6	92.1	98.3	90.8	156.7
56	159.3	150.3	109.6	95.6	102.1	94.4	162.4
58	164.9	155.7	113.7	99.3	105.9	98.0	168.1
60	170.7	161.1	117.9	103.0	109.8	101.6	174.0
65	185.8	175.4	128.9	112.7	120.1	111.2	189.5
70	201.8	190.5	140.5	123.0	131.0	121.4	205.8
75	218.7	206.5	152.8	133.9	142.5	132.2	223.2
80	236.5	223.4	165.8	145.4	154.7	143.6	241.5
82	244.0	230.4	171.2	150.2	159.8	148.4	249.1
84	251.6	237.6	176.8	155.1	165.0	153.2	256.9
86	259.3	244.9	182.4	160.1	170.3	158.2	264.9
88	267.3	252.4	188.2	165.2	175.7	163.2	273.0
90	275.4	260.0	194.1	170.4	181.2	168.4	281.3
92	283.6	267.9	200.1	175.7	186.8	173.7	289.8
94	292.1	275.8	206.3	181.2	192.6	179.1	298.5
96	300.7	284.0	212.5	186.7	198.5	184.6	307.4
98	309.5	292.3	219.0	192.4	204.5	190.2	316.4
100	318.5	300.8	225.5	198.2	210.6	195.9	325.7
102	327.7	309.4	232.2	204.1	216.8	201.8	335.1
104	337.1	318.3	239.0	210.2	223.2	207.7	344.8
106	346.7	327.3	245.9	216.3	229.7	213.8	354.6
108	356.5	336.5	253.0	222.6	236.4	220.0	364.6
110	366.4	345.9	260.3	229.0	243.1	226.4	374.9
112	376.6	355.4	267.6	235.6	250.1	232.8	385.3
114	387.0	365.2	275.1	242.3	257.1	239.4	396.0
116	397.6	375.2	282.8	249.1	264.3	246.1	406.9
118	408.4	385.3	290.6	256.0	271.6	253.0	418.0
120	419.4	395.7	298.6	263.1	279.1	260.0	429.3
122	430.7	406.2	306.7	270.3	286.7	267.1	440.9
124	442.1	417.0	315.0	277.7	294.4	274.3	452.7
126	453.8	427.9	323.4	285.2	302.3	281.7	464.7
128	465.8	439.1	332.0	292.8	310.3	289.2	477.0
130	477.9	450.5	340.7	300.6	318.5	296.9	489.5
135	509.4	479.9	363.3	320.7	339.7	316.7	521.8
140	542.5	510.7	386.9	341.8	361.9	337.4	555.8
150	613.9	576.8	437.5	387.1	409.2	381.7	628.8



Refrigerants by The Chemours Company

Pressure-Temperature Guide for A/C

Key: **Green** (in of Hg) = Vacuum
 Black (bar_g) = Saturated Vapor (calculate superheat)
Black (bar_g) = Saturated Liquid (calculate subcooling)

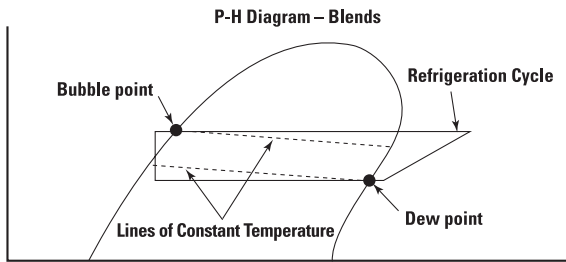

To determine superheat, use **dew point** values.
 To determine subcooling, use **bubble point** values.

DO NOT MIX REFRIGERANTS

No A2L refrigerant is to be used as a retrofit refrigerant
A2L refrigerants can only be used in new equipment
Always remove refrigerant blends from the cylinder as liquid

For refrigerant related support, contact our Tech2Tech Support Team:

tech2tech@chemours.com 866-433-TECH
 (8324)



To add our Tech2Tech Support as a contact in your mobile device, use the QR Code above.

For more information about Opteon™ refrigerants, visit opteon.com



© 2024 The Chemours Company FC, LLC. Freon™, Opteon™, and any associated logos are trademarks or copyrights of The Chemours Company FC, LLC. Chemours™ and the Chemours Logo are trademarks of The Chemours Company.

OPTXLPTAC-2 01/24

	Freon™ 410A (R-410A)	Opteon™ XL41 (R-454B)	Freon™ 407C (R-407C)	Freon™ NU-22B™ (R-422B)	Freon™ MO99™ (R-438A)	Freon™ 22 (R-22)	R-32
SAFETY GROUP	A1	A2L	A1	A1	A1	A1	A2L
°C	psig	psig	psig	psig	psig	psig	psig
-50	0.07	-0.03	-0.51	-0.53	-0.52	-0.37	0.09
-48	0.19	0.08	-0.45	-0.47	-0.46	-0.30	0.20
-46	0.31	0.19	-0.39	-0.41	-0.40	-0.22	0.33
-44	0.44	0.31	-0.32	-0.34	-0.33	-0.14	0.46
-42	0.58	0.44	-0.24	-0.27	-0.26	-0.06	0.61
-40	0.74	0.58	-0.16	-0.19	-0.18	0.04	0.76
-38	0.90	0.73	-0.07	-0.10	-0.09	0.14	0.93
-36	1.08	0.89	0.03	-0.01	0.01	0.25	1.11
-34	1.26	1.06	0.14	0.10	0.11	0.37	1.30
-32	1.47	1.24	0.25	0.20	0.22	0.49	1.50
-30	1.68	1.44	0.37	0.32	0.34	0.63	1.72
-28	1.91	1.65	0.51	0.45	0.47	0.77	1.95
-26	2.15	1.87	0.65	0.58	0.60	0.92	2.20
-24	2.41	2.11	0.80	0.73	0.75	1.08	2.47
-22	2.69	2.36	0.96	0.88	0.91	1.26	2.75
-20	2.98	2.63	1.13	1.05	1.07	1.44	3.04
-18	3.29	2.91	1.32	1.22	1.25	1.63	3.36
-16	3.62	3.21	1.52	1.41	1.44	1.84	3.69
-14	3.96	3.53	1.73	1.61	1.64	2.06	4.05
-12	4.33	3.86	1.95	1.82	1.86	2.29	4.42
-10	4.71	4.21	2.18	2.05	2.09	2.53	4.81
-8	5.12	4.59	2.44	2.28	2.33	2.79	5.23
-6	5.55	4.98	2.70	2.53	2.58	3.06	5.67
-4	6.00	5.39	2.98	2.80	2.85	3.35	6.13
-2	6.47	5.83	3.28	3.08	3.14	3.65	6.61
0	6.97	6.28	3.59	3.38	3.44	3.97	7.12
2	7.49	6.76	3.93	3.69	3.76	4.30	7.65
4	8.04	7.26	4.27	4.02	4.09	4.65	8.21
6	8.61	7.79	4.64	4.36	4.45	5.01	8.80
8	9.21	8.34	5.03	4.73	4.82	5.40	9.41
10	9.87	9.31	6.75	5.88	6.28	5.80	10.06
12	10.53	9.93	7.23	6.30	6.73	6.22	10.73
14	11.22	10.59	7.73	6.74	7.19	6.65	11.43
16	11.93	11.26	8.25	7.21	7.68	7.11	12.17
18	12.68	11.97	8.79	7.69	8.19	7.59	12.93
20	13.46	12.71	9.36	8.19	8.73	8.09	13.73
22	14.28	13.48	9.96	8.71	9.28	8.61	14.57
24	15.12	14.28	10.57	9.26	9.86	9.15	15.44
26	16.01	15.12	11.21	9.83	10.46	9.71	16.34
28	16.93	15.98	11.88	10.42	11.09	10.30	17.28
30	17.88	16.89	12.58	11.04	11.74	10.91	18.26
32	18.87	17.82	13.30	11.68	12.42	11.54	19.28
34	19.91	18.80	14.05	12.34	13.12	12.20	20.34
36	20.98	19.81	14.83	13.03	13.85	12.88	21.44
38	22.09	20.86	15.64	13.75	14.61	13.59	22.58
40	23.24	21.94	16.48	14.49	15.39	14.32	23.77
42	24.44	23.07	17.35	15.26	16.21	15.08	25.00
44	25.68	24.24	18.25	16.06	17.05	15.87	26.28
46	26.97	25.45	19.18	16.89	17.92	16.69	27.60
48	28.31	26.71	20.15	17.75	18.83	17.54	28.98
50	29.69	28.01	21.15	18.64	19.76	18.41	30.40
52	31.13	29.35	22.18	19.56	20.73	19.32	31.87
54	32.61	30.74	23.25	20.51	21.74	20.26	33.40
56	34.15	32.18	24.36	21.50	22.77	21.23	34.98
58	35.75	33.67	25.50	22.51	23.84	22.23	36.62
60	37.41	35.21	26.68	23.57	24.95	23.26	38.32
62	39.12	36.81	27.90	24.66	26.09	24.33	40.08
64	40.90	38.45	29.16	25.78	27.27	25.43	41.90
66	42.74	40.15	30.46	26.95	28.49	26.57	43.78